

AN APPLICATION OF SOMMERFELD'S COMPLEX ORDER WAVE FUNCTIONS  
TO ANTENNA THEORY

by  
C. H. Papas

CALIFORNIA INSTITUTE OF TECHNOLOGY  
Pasadena, California

A Technical Report to the Office of Naval Research

Prepared for  
Office of Naval Research Contract

Nonr 220(14)  
NR 071-262

January 1954

THIS REPORT HAS BEEN DELIMITED  
AND CLEARED FOR PUBLIC RELEASE  
UNDER DOD DIRECTIVE 5200.20 AND  
NO RESTRICTIONS ARE IMPOSED UPON  
ITS USE AND DISCLOSURE.

DISTRIBUTION STATEMENT A

APPROVED FOR PUBLIC RELEASE;  
DISTRIBUTION UNLIMITED.

AN APPLICATION OF SOMMERFELD'S COMPLEX ORDER WAVE FUNCTIONS  
TO ANTENNA THEORY

Abstract

In the past wave functions of integral order have been used quite advantageously in the solution of certain antenna and boundary-value problems. However, in some instances these wave functions are completely alien to the problem and introduce difficulties which, indeed, can be resolved but only at the expense of logical simplicity. To place in evidence the usefulness and "naturalness" of complex order wave functions for the solution of certain problems, we examine theoretically the input admittance of a boss antenna with the aid of these functions.

Introduction

Suppose we desire to construct a solution to the wave equation

$$(\nabla^2 + k^2) u = 0 \quad (1)$$

where  $u$  must satisfy the Sommerfeld radiation condition and must assume prescribed values on the surface of a sphere of radius  $a$ . Using spherical coordinates  $r, \theta, \phi$  with origin at center of sphere, assuming that  $u$  is independent of the azimuthal angle  $\phi$ , and requiring that on the surface of sphere

$$\alpha u + \beta \frac{\partial}{\partial r} u = f(\theta) \quad (2)$$

where  $\alpha$  and  $\beta$  are constants, we consider a solution to (1) of the form

$$u(r, \theta) = \sum_{n=0}^{\infty} A_n P_n(\cos \theta) h_n^{(1)}(kr) \quad (3)$$

where  $P_n(\cos \theta)$  is the Legendre polynomial of integral order  $n$  and  $h_n^{(1)}(kr)$  is the spherical Hankel function of the same order. The  $A_n$ 's are constants which have to be determined by requiring that (3) satisfy (2) when

$r = a$ . As it stands, (3) satisfies the radiation condition,

$$\lim_{r \rightarrow \infty} r \left( \frac{\partial}{\partial r} u - iku \right) = 0 \quad (4)$$

because as  $r \rightarrow \infty$  the spherical Hankel functions have the behaviour of an outwardly propagating wave,

$$h_n^{(1)}(kr) \sim (-1)^{n+1} \frac{e^{ikr}}{kr} \quad (5)$$

To determine the unknown constants, the  $A_n$ 's, we substitute (3) into (2) and use the orthogonality property of the Legendre polynomials,

$$\int_0^\pi P_n(\cos \theta) P_m(\cos \theta) \sin \theta d\theta = \delta_{nm} \frac{2}{2m+1} \quad (6)$$

where  $\delta_{nm} = 0, 1$  when  $n \neq m, n = m$  respectively. Thus

$$A_m = \frac{2m+1}{2} \frac{\int_0^\pi f(\theta) P_m(\cos \theta) \sin \theta d\theta}{\left[ \alpha h_m^{(1)}(ka) + \beta \frac{\partial}{\partial r} h_m^{(1)}(ka) \right]} \quad (7)$$

Substituting (7) into (3) we have the desired solution. It is clear that the crux of this problem is the orthogonality of the Legendre polynomials. If this orthogonality did not exist, it would be impossible to determine the  $A_n$ 's. However, for certain problems it would be much more convenient and "natural" if the radial functions, instead of the angular functions, were orthogonal. This is true, for example, if the wave function has to satisfy on a conical surface boundary conditions which depend on  $r$ . In the boss antenna problem the wave function must satisfy just such boundary conditions.

In this note we first develop some properties of the complex order wave functions. We find that  $u$  can be represented in the form of an infinite series, each term of which is the product of an angular function and a radial function. The angular and radial functions prove to be the

Legendre functions and the spherical Hankel functions of complex order respectively. And now it is the spherical Hankel functions of complex order that are orthogonal. Then we apply these wave functions to the calculation of the input impedance of a boss antenna.

### Complex Order Wave Functions

Let us consider in spherical coordinates  $r, \theta, \phi$ , a TM field,  $\underline{E} = \underline{r} E_r + \underline{\theta} E_\theta$ ,  $\underline{H} = \phi H_\phi$  where  $\underline{r}, \underline{\theta}, \underline{\phi}$ , are the unit vectors and  $E_r, E_\theta, H_\phi$  are the non-vanishing components of the electromagnetic field. For steady-state, i.e., time dependence  $\exp(-i\omega t)$ , the complex vectors  $\underline{E}$  and  $\underline{H}$  satisfy the Maxwell equations,

$$\nabla \times \underline{E} = i\omega\mu \underline{H} \quad (8)$$

$$\nabla \times \underline{H} = i\omega\epsilon \underline{E} \quad (9)$$

from which it follows that

$$\nabla \times \nabla \times \underline{H} = k^2 \underline{H} \quad (10)$$

where  $k^2 = \omega^2 \epsilon \mu$  and  $\epsilon, \mu$  denote the dielectric constant and permeability of free space. If we assume that  $\underline{E}$  and  $\underline{H}$  are independent of the azimuthal angle  $\phi$ , then in spherical coordinates (10) takes the form

$$\frac{\partial^2}{\partial r^2} (r H_\phi) + \frac{1}{r} \frac{\partial}{\partial \theta} \left[ \frac{1}{\sin \theta} \frac{\partial}{\partial \theta} (H_\phi \sin \theta) \right] + k^2 r H_\phi = 0 \quad (11)$$

If we set

$$H_\phi = i\omega\epsilon \frac{\partial}{\partial \theta} u \quad (12)$$

then (11) can be written as

$$i\omega\epsilon \frac{\partial}{\partial \theta} \left[ (\nabla^2 + k^2) u(r, \theta) \right] = 0 \quad (13)$$

We choose  $u(r, \theta)$  such that

$$(\nabla^2 + k^2) u(r, \theta) = 0 \quad (14)$$

for all permissible values of  $r$  and  $\theta$ . Then according to (9) and (12) the electromagnetic field is given by the following expressions:

$$E_r = -\frac{1}{r \sin \theta} \frac{\partial}{\partial \theta} (\sin \theta \frac{\partial}{\partial \theta} u) \quad (15)$$

$$E_\theta = \frac{1}{r} \frac{\partial}{\partial \theta} \frac{\partial}{\partial r} (r u) \quad (16)$$

$$H_\phi = i\omega \epsilon \frac{\partial}{\partial \theta} u \quad (17)$$

Now we examine the solution of the wave equation (14) that satisfies the radiation condition (4) and the boundary condition,

$$\frac{\partial}{\partial r} (r u) = 0 \quad \text{when } r = a \quad (18)$$

In view of (16) it is seen that the condition (18) is equivalent to requiring that  $E_\theta$  vanish over surface of sphere of radius  $a$ .

Writing  $u(r, \theta)$  explicitly in separated form,  $u = R(r) P(\cos \theta)$  (14) yields two ordinary differential equations

$$\frac{1}{\sin \theta} \frac{d}{d\theta} (\sin \theta \frac{dP}{d\theta}) + CP = 0 \quad (19)$$

$$\frac{1}{R} \frac{d}{dr} (r^2 \frac{dR}{dr}) + k^2 r^2 = C \quad (20)$$

where  $C$  is the separation constant. If we choose  $C = \nu(\nu + 1)$  where  $\nu$  is unrestricted (a complex number), the solution of (19) is the Legendre function  $P_\nu(\cos \theta)$ . This function is identical to the hypergeometric function, i.e.,

$$P_\nu(\cos \theta) = F(-\nu, \nu + 1, 1, \frac{1 - \cos \theta}{2}) \quad (21)$$

and is finite for all  $\theta$  except  $\theta = \pi$ . The corresponding solution of (20) is the spherical Hankel function of the first kind  $h_\nu^{(1)}(kr)$  and it is related to the cylindrical Hankel function of the first kind  $H_{\nu+1/2}^{(1)}(kr)$

according to the relation,

$$h_{\nu}^{(1)}(kr) = \sqrt{\frac{\pi}{2kr}} H_{\nu+1/2}^{(1)}(kr) \quad (22)$$

Hence, we can write the solution of (14) as

$$u(r, \theta) = \sum_{\nu} A_{\nu} h_{\nu}^{(1)}(kr) P_{\nu}(\cos \theta) \quad (23)$$

where the summation is over all values of  $\nu$  determined by the boundary condition (18). Substituting (23) into (18) we obtain

$$\sum_{\nu} A_{\nu} \frac{\partial}{\partial r} (a h_{\nu}^{(1)}(ka)) P_{\nu}(\cos \theta) = 0 \quad (24)$$

To satisfy (24) the  $\nu$ 's are chosen so that

$$\left[ \frac{\partial}{\partial r} (r h_{\nu}^{(1)}(kr)) \right]_{r=a} = 0 \quad (25)$$

We denote these  $\nu$ 's as  $\nu_1, \nu_2, \nu_3$ , etc.

The radial functions  $h_{\nu}^{(1)}(x)$  are orthogonal over the range  $x = ka$  to  $x = \infty$ . To show this we recall from (20) that for any  $\nu$ , say,

$$\nu_n \quad x \frac{d^2}{dx^2} (x h_{\nu_n}^{(1)}(x)) + (x^2 - \nu_n(\nu_n + 1)) h_{\nu_n}^{(1)}(x) = 0 \quad (26)$$

and for any other value of  $\nu$ , say,  $\nu_m$

$$x \frac{d^2}{dx^2} (x h_{\nu_m}^{(1)}(x)) + (x^2 - \nu_m(\nu_m + 1)) h_{\nu_m}^{(1)}(x) = 0 \quad (27)$$

Multiplying (26) by  $h_{\nu_m}^{(1)}$  and (27) by  $h_{\nu_n}^{(1)}$  and then integrating the difference from  $x = ka$  to  $x = \infty$ , we obtain

$$\begin{aligned}
 & \left[ \nu_m (\nu_m + 1) - \nu_n (\nu_n + 1) \right] \int_{ka}^{\infty} h_{\nu_n}^{(1)}(x) h_{\nu_m}^{(1)}(x) dx = \\
 & \int_{ka}^{\infty} \left[ x h_{\nu_n}^{(1)}(x) \frac{d^2}{dx^2} (x h_{\nu_m}^{(1)}(x)) - x h_{\nu_m}^{(1)}(x) \frac{d^2}{dx^2} (x h_{\nu_n}^{(1)}(x)) \right] dx = \\
 & \left[ x h_{\nu_n}^{(1)}(x) \frac{d}{dx} (x h_{\nu_m}^{(1)}(x)) - x h_{\nu_m}^{(1)}(x) \frac{d}{dx} (x h_{\nu_n}^{(1)}(x)) \right]_{ka}^{\infty} \quad (28)
 \end{aligned}$$

where the last equality results from an integration by parts. The integrated term disappears at  $x = ka$  and  $x = \infty$  by virtue of (25) and the asymptotic behaviour of  $h_{\nu}^{(1)}(z)$ . Thus

$$\int_{ka}^{\infty} h_{\nu_n}^{(1)}(x) h_{\nu_m}^{(1)}(x) dx = \delta_{nm} N_{\nu_n}(ka) \quad (29)$$

$N_{\nu_n}(ka)$  is a normalization factor which can be obtained from (28) by an application of l'Hospital's rule for the limit  $\nu_n \rightarrow \nu_m$ , and, of course,  $\delta_{nm}$  is the well-known Kronecker delta.

Hence, the solution of (14) which satisfies the boundary condition (18) and the Sommerfeld radiation condition is given by a sum over all  $\nu$ 's:

$$u(r, \theta) = \sum_{\nu} A_{\nu} h_{\nu}^{(1)}(kr) P_{\nu}(\cos \theta) \quad (30)$$

where the  $A_{\nu}$ 's are as yet undetermined constants. Once we are given  $u(r, \theta_0)$  on any conical surface  $\theta = \theta_0$ , the  $A_{\nu}$ 's are determinable by virtue of the orthogonality condition (29). Contrasting (3) and (30) we see that (3) is appropriate for boundary conditions on a sphere, whereas (30) is appropriate for cones.

Substituting (30) into (15), (16), and (17) we find the electromagnetic field in terms of the complex order wave functions,  $h_{\nu}^{(1)}(kr) P_{\nu}(\cos \theta)$



$$H_\theta(r, \theta) = i\omega \epsilon \sum A_\nu h_\nu^{(1)}(kr) \frac{\partial}{\partial \theta} P_\nu(\cos \theta), \quad (31)$$

$$E_\theta(r, \theta) = \frac{1}{r} \sum A_\nu \frac{\partial}{\partial r} (r h_\nu^{(1)}(kr)) \frac{\partial}{\partial \theta} P_\nu(\cos \theta), \quad (32)$$

and since  $P_\nu(\cos \theta)$  satisfies (19) when  $C = \nu(\nu+1)$ ,

$$E_r(r, \theta) = \frac{1}{r} \sum A_\nu \nu(\nu+1) h_\nu^{(1)}(kr) P_\nu(\cos \theta) \quad (33)$$

#### An Application to Antenna Theory

To place in evidence the usefulness of these complex order wave functions, we shall use them to compute the admittance of a boss antenna. A boss antenna consists of a coaxial line fitted with an infinite flange and a hemispherical boss at the end of the inner conductor (fig. 1). Except for the addition of a hemispherical boss, it is identical to the circular diffraction antenna.<sup>(2)</sup>

We assume the antenna is excited by a single propagating mode (the principal mode) in the coaxial region. This mode has no azimuthal variation. The non-vanishing components of the field in the coaxial region,  $z \leq 0$ ,  $a \leq \rho \leq b$ , are  $H_\theta$ ,  $E_\rho$ ,  $E_z$  and in the antenna region,  $r \geq a$ ,  $\theta \leq \frac{\pi}{2}$ , the non-vanishing components are  $H_\theta$ ,  $E_r$ ,  $E_\theta$ . Cylindrical coordinates are used in the coaxial region and spherical coordinates in the antenna region.

In the antenna region, according to (33), the r-component of the electric field is given by

$$E_r(r, \theta) = \frac{1}{r} \sum A_\nu \nu(\nu+1) h_\nu^{(1)}(kr) P_\nu(\cos \theta), \quad r \geq a, \quad \theta \leq \frac{\pi}{2}. \quad (33a)$$

If we denote  $E_r(r, \frac{\pi}{2})$  by  $\mathcal{E}(r)$ , (33a) becomes

$$0 = \frac{1}{r} \sum A_\nu \nu(\nu+1) h_\nu^{(1)}(kr) P_\nu(0), \quad r \geq b, \quad \theta = \frac{\pi}{2} \quad (34a)$$

$$\mathcal{E}(r) = \frac{1}{r} \sum A_\nu \nu(\nu+1) h_\nu^{(1)}(kr) P_\nu(0), \quad a \leq r \leq b, \quad \theta = \frac{\pi}{2} \quad (34b)$$

since the component of the electric field tangent to the perfectly conducting baffle must disappear. Multiplying both sides of (34) by  $rh_{\nu}^{(1)}(kr)$  and integrating from  $kr = ka$  to  $kr = \infty$ , we obtain by virtue of the orthogonality relation (29),

$$A_{\nu} = \frac{\int_{ka}^{\infty} r \xi(r) h_{\nu}(kr) d(kr)}{\nu(\nu+1) P_{\nu}(0) N_{\nu}(ka)} \quad (35)$$

Substituting (35) into (31), we see that the magnetic field at any point in the antenna region is given by

$$H_{\theta}^{(+)}(r, \theta) = i \omega \epsilon \int_{ka}^{\infty} r' \xi(r') d(kr') \sum \frac{h_{\nu}(kr) h_{\nu}(kr')}{\nu(\nu+1) P_{\nu}(0) N_{\nu}(ka)} \frac{\partial}{\partial \theta} P_{\nu}(\cos \theta) \quad (36)$$

According to eq. (2.34) of reference 2, the magnetic field in the coaxial region  $a \leq \rho \leq b$ ,  $z \leq 0$  is given by

$$H_{\theta}^{(-)}(\rho, z) = \frac{I(z)}{2\pi\rho} + i \omega \epsilon \int_a^b \xi(\rho') \rho' d\rho' \sum \frac{R_n(\rho) R_n(\rho')}{\sqrt{\lambda_n^2 - k^2}} e^{\sqrt{\lambda_n^2 - k^2} z} \quad (37)$$

where  $I(z)$  is the coaxial line current and  $\xi(\rho)$  is the  $\rho$ -component of the electric field across the aperture.  $\xi(\rho)$  and  $\xi(r)$  of (34b) are identical since in the plane of the baffle the  $r$ -coordinate of the spherical coordinate system and the  $\rho$ -coordinate of the cylindrical coordinate system are identical. The eigenvalues  $\lambda_n$  and the eigenfunctions  $R_n(\rho)$  are defined by

$$\left( \frac{\partial^2}{\partial \rho^2} + \frac{1}{\rho} \frac{\partial}{\partial \rho} - \frac{1}{\rho^2} + \lambda_n^2 \right) R_n(\rho) = 0 \quad (38)$$

$$\left( \frac{\partial}{\partial \rho} + \frac{1}{\rho} \right) R_n(\rho) = 0 \quad \text{at } \rho = a, b \quad (39)$$

and the  $\lambda_n$ 's are roots of the transcendental equation

$$J_0(\lambda_n a) N_0(\lambda_n b) - N_0(\lambda_n a) J_0(\lambda_n b) \quad (40)$$

The orthogonality relations,

$$\int_a^b R_n(\rho) R_m(\rho) \rho d\rho = \delta_{nm} \quad (41)$$

$$\int_a^b R_n(\rho) d\rho = 0 \quad (42)$$

immediately follow from (38) and (39).

Since  $H_\phi$  must be continuous across the aperture, we have  $H_\phi^{(+)}(r, \frac{\pi}{2}) = H_\phi^{(-)}(\rho, 0)$  for  $a \leq \rho \leq b$ . Thus from (36) and (37)

$$\begin{aligned} \frac{I(0)}{2\pi\rho} + i\omega\epsilon \int_a^b E_\phi(\rho') \rho' d\rho' \sum \frac{R_n(\rho) R_n(\rho')}{\sqrt{\lambda_n^2 - k^2}} = \\ i\omega\epsilon k \int_{ka}^\infty r' E_\phi(r') dr' \sum \frac{h_\nu(kr) h_\nu(kr') \frac{\partial}{\partial \theta} P_\nu(0)}{\nu(\nu+1) P_\nu(0) N_\nu(ka)} \end{aligned} \quad (43)$$

This is an integral equation. We shall not attempt to solve it. Rather, we shall use it to formulate a variational principle for the antenna admittance.

From (2.26) and (2.27) of reference 2 the coaxial line current and voltage are given by

$$I(z) = 2\pi (\alpha e^{-kz} + \beta e^{ikz}) \quad (44)$$

$$V(z) = \int_a^b E_\rho^{(-)}(\rho, z) d\rho = \sqrt{\frac{\mu}{\epsilon}} (\alpha e^{ikz} - \beta e^{ikz}) \log \frac{b}{a} \quad (45)$$

where  $\alpha$  and  $\beta$  are constants.

The characteristic admittance of the line is given by

$$Y_0 = \frac{2\pi}{\sqrt{\frac{1}{\epsilon}} \log\left(\frac{b}{a}\right)} \quad (46)$$

Now let us derive the variational principle for the admittance

$Y(0)$  where

$$Y(0) = \frac{I(0)}{V(0)} \quad (47)$$

We do this by multiplying (43) by  $\rho \mathcal{E}(\rho)$  and integrating from  $\rho = a$  to  $\rho = b$ , and finally dividing the resultant equation by

$$\left[ \int_a^b \mathcal{E}(\rho) d\rho \right]^2 = [V(0)]^2$$

Thus

$$\begin{aligned} \frac{1}{2\pi} Y(0) + \frac{1}{\left[ \int_a^b \mathcal{E}(\rho) d\rho \right]^2} \sum \frac{\left( \int_a^b \rho \mathcal{E}(\rho) R_n(\rho) d\rho \right)^2}{\sqrt{\lambda_n^2 - k^2}} = \\ \frac{1}{\left[ \int_a^b \mathcal{E}(\rho) d\rho \right]^2} \sum \frac{\left( \int_a^b \rho' d\rho' \mathcal{E}(\rho') h_{\nu}^{(1)}(k\rho') \right)^2}{\nu(\nu+1) N_{\nu}(ka)} \frac{\frac{\partial}{\partial \theta} P_{\nu}(0)}{P_{\nu}(0)} \end{aligned} \quad (48)$$

It can be easily shown that  $Y(0)$  is stationary with respect to small variations of  $\mathcal{E}(\rho)$  about the true  $\mathcal{E}(\rho)$  determined by the integral equation (43).

We choose  $\frac{1}{\rho}$  as a trial function. That is, we let  $\mathcal{E}(\rho) = \frac{1}{\rho}$  in (48). Due to the orthogonality relation (42), (48) becomes

$$Y(0) = \frac{2\pi i \omega \epsilon k}{\left[ \log \frac{b}{a} \right]^2} \sum \frac{\left( \int_a^b h_{\nu}^{(1)}(k\rho) d\rho \right)^2}{\nu(\nu+1) N_{\nu}(ka)} \frac{\frac{\partial}{\partial \theta} P_{\nu}(0)}{P_{\nu}(0)} \quad (49)$$

This is an accurate expression for the admittance of the antenna. It is sometimes more useful to consider the ratio  $Y(0)/Y_0$ , which is a dimensionless quantity.

$$\frac{Y(0)}{Y_0} = \frac{1}{\log \left( \frac{b}{a} \right)} \frac{\left( \int_{ka}^{kb} h_{\nu}^{(1)}(k\rho) d(k\rho) \right)^2}{\int_{ka}^{\infty} [h_{\nu}^{(1)}(k\rho)]^2 d(k\rho)} \frac{1}{\nu(\nu+1)} \frac{\frac{\partial}{\partial \nu} P_{\nu}(0)}{P_{\nu}(0)} \quad (50)$$

This is only a formal solution, however. Since the values of the functions involved have not been tabulated, only certain limiting values<sup>(3)</sup> can be at present obtained for (50).

#### References:

1. A. Sommerfeld, "Partial Differential Equations", Academic Press, New York 1949
2. H. Levine and C. H. Papas, J. App. Phys., Vol.22, No.1, 29-43
3. H. Bremmer, "Terrestrial Radio Waves", Elsevier, New York 1949.

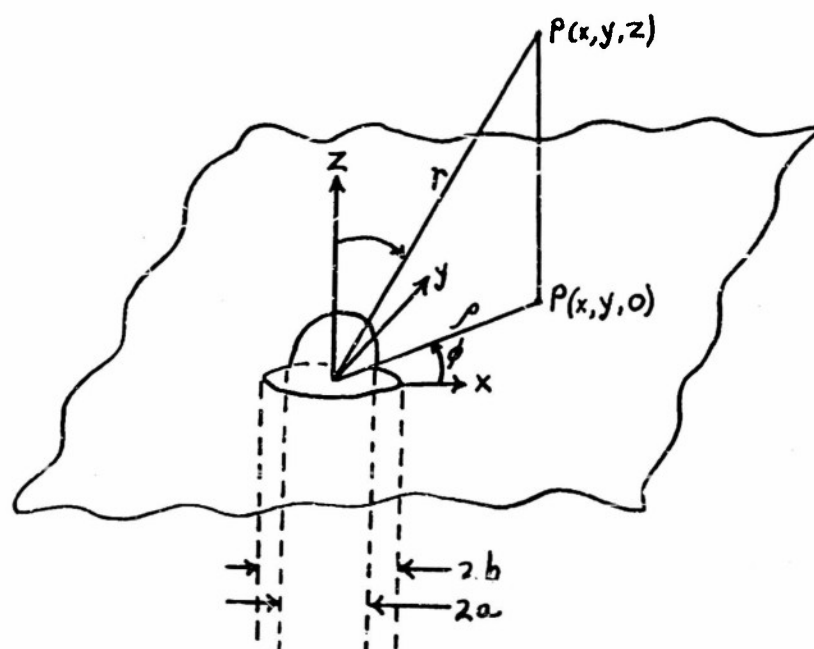


Figure 1. BOSS ANTENNA CONSISTING OF COAXIAL LINE  
FITTED WITH FLANGE AND HEMISPHERICAL BOSS

CALIFORNIA INSTITUTE OF TECHNOLOGY

Distribution List

Technical Reports

Nonr 220(14)

NR 071-262

<u>Addressee</u>	<u>Attn</u>	<u>No. of Copies</u>
Chief of Naval Research	Code 427	2
Navy Department	460	2
Washington 25, D. C.		
Director	Code 2000	6
Naval Research Laboratory	3480	1
Washington 25, D. C.		
Commanding Officer		1
Office of Naval Research Branch Office		
1000 Geary Street		
San Francisco 9, California		
Commanding Officer		1
Office of Naval Research Branch Office		
1030 E. Green Street		
Pasadena, California		
Commanding Officer		1
Office of Naval Research Branch Office		
The John Crerar Library Building		
86 East Randolph Street		
Chicago 1, Illinois		
Commanding Officer		1
Office of Naval Research Branch Office		
346 Broadway		
New York 13, New York		
Officer-in-Charge		2
Office of Naval Research		
Navy No. 100		
Fleet Post Office		
New York, New York		
Chief, Bureau of Ordnance	Re 4	1
Navy Department		
Washington 25, D. C.		
Chief, Bureau of Ships	Code 810	2
Navy Department		
Washington 25, D. C.		

<u>Addressee</u>	<u>Attn</u>	<u>No. of Copies</u>
Chief, Bureau of Aeronautics Navy Department Washington 25, D. C.	EL-51	1
Chief of Naval Operations Navy Department Washington 25, D. C.	Op-413 Op-20X Op-32	1 1 1
Director Naval Ordnance Laboratory White Oak, Maryland		1
Commander U. S. Naval Electronics Laboratory San Diego, California		1
Commander Naval Air Development Center Johnsville, Pennsylvania	AAEL	1
Commanding Officer and Director U.S. Navy Underwater Sound Laboratory New London, Connecticut		1
U.S. Naval Post Graduate School Monterey, California	Librarian	1
U.S. Coast Guard 1300 E. Street, N.W. Washington 25, D. C.	EEE	1
Assistant Secretary of Defense (Research and Development) Research and Development Board Department of Defense Washington 25, D. C.		1
Armed Services Technical Information Agency Document Service Center Knott Building Dayton 2, Ohio		5
Office of Technical Services Department of Commerce Washington 25, D. C.		1
Director National Bureau of Standards Connecticut Ave. and Van Ness St, N.W. Washington 25, D. C.	Dr. N. Smith Div.14, Librarian	1 1



<u>Addressee</u>	<u>Attn</u>	<u>No. of Copies</u>
Electrical Engineering Department University of California Berkeley, California	Dr. L. Reukema	1
Department of Electrical Engineering Cornell University Ithaca, New York	Dr. C. R. Burrows	1
Department of Electrical Engineering University of Illinois Urbana, Illinois	Prof. E. C. Jordan	1
Applied Physics Laboratory Johns Hopkins University 8621 Georgia Avenue Silver Spring, Maryland		1
Radiation Laboratory Johns Hopkins University 1315 St. Paul Street Baltimore 2, Maryland		1
Research Laboratory of Electronics Document Room Massachusetts Institute of Technology Cambridge 39, Massachusetts	Mr. J. Hewitt	1
Stanford Research Institute Stanford, California	Dr. John V.N. Granger	1
Electrical Engineering Department University of Texas Box F, University Station Austin, Texas		1
Bell Telephone Laboratories, Inc. Murray Hill, New Jersey		1
General Electric Company The Knolls Schenectady, New York	Mr. R. Damon	1
Radio Corporation of America RCA Laboratories Division Princeton, New Jersey	Librarian	1
Watson Laboratories Library, AMC Red Bank, New Jersey	ENAGS1	1
Electronics Research Laboratory Stanford University Stanford, California	Dr. F. E. Terman	1

<u>Addressee</u>	<u>Attn</u>	<u>No. of Copies</u>
Mathematics Research Group New York University 45 Astor Place New York, New York	Dr. M. Kline	1
Chairman Department of Engineering University of California Los Angeles, California		1
Harvard University Cambridge, Massachusetts	Dr. R. King	1
Director Los Alamos Scientific Laboratory Los Alamos, New Mexico		1